

ANT130-R Series

Single-Axis Rotary Direct-Drive Nanopositioning Stages

- High resolution (0.01 arc sec)
- High performance
- Unlimited rotation
- Outstanding error motion specifications
- Excellent in-position stability
- Multi-axis configurations
- High dynamic performance

nano Motion Technology



The ANT130-R and ANT130-R-PLUS direct-drive rotary stages are designed as part of Aerotech's nano Motion Technology product family. Our rotary stages offer unprecedented in-position stability (0.005 arc sec) and sub 0.01 arc-sec incremental motion performance, and are offered in two grades of accuracy.

Multi-Axis Capabilities


The ANT130-R series is designed for compatibility and easy integration with Aerotech's ANT linear stage product offerings. Together these stages provide accuracy, stability, and small-size performance capability for almost any nano-manufacturing or inspection application.

Dynamic Performance

In addition to the high precision levels, these systems offer high dynamic performance and throughput ideal for disk drive manufacture and test.

Durability

The ANT130-R stage series was designed to operate in a 24/7 manufacturing environment. Unlike other rotary devices, the ANT130-R requires no periodic maintenance, assuring years of trouble-free operation.

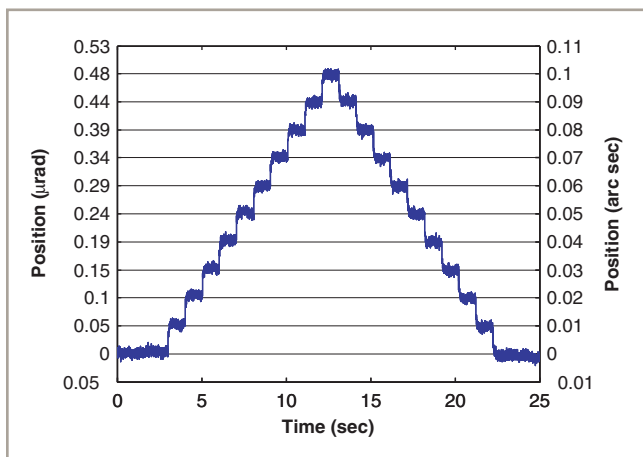

ANT130-R 0.01 arc sec step plot. Best-in-class resolution and exceptional in-position stability for unlimited rotation stages. See additional performance graphs on the following pages.

ANT130-R/ANT130-R-PLUS Series SPECIFICATIONS

Mechanical Specifications	ANT130-20-R	ANT130-20-R-PLUS	ANT130-180-R	ANT130-180-R-PLUS	ANT130-360-R	ANT130-360-R-PLUS
Rotation Angle	20°	20°	180°	180°	±360° Continuous	±360° Continuous
Accuracy ⁽¹⁾	10 arc sec	3 arc sec	10 arc sec	3 arc sec	10 arc sec	3 arc sec
Resolution	0.01 arc sec	0.01 arc sec	0.01 arc sec	0.01 arc sec	0.01 arc sec	0.01 arc sec
Repeatability (Bi-Directional) ⁽¹⁾	1.5 arc sec	1.5 arc sec	1.5 arc sec	1.5 arc sec	1.5 arc sec	1.5 arc sec
Repeatability (Uni-Directional)	0.5 arc sec	0.5 arc sec	0.5 arc sec	0.5 arc sec	0.5 arc sec	0.5 arc sec
Tilt Error Motion	Synchronous	NA	NA	NA	10 arc sec	10 arc sec
	Asynchronous	NA	NA	NA	3 arc sec	3 arc sec
Axial Error Motion ⁽¹⁾	Synchronous	NA	NA	NA	2 µm	2 µm
	Asynchronous	NA	NA	NA	0.5 µm	0.5 µm
Radial Error Motion ⁽¹⁾	Synchronous	NA	NA	NA	3 µm	3 µm
	Asynchronous	NA	NA	NA	1 µm	1 µm
Maximum Speed	20 rpm	20 rpm	20 rpm	20 rpm	200 rpm	200 rpm
Maximum Acceleration	400 rad/s ²	400 rad/s ²	400 rad/s ²	400 rad/s ²	400 rad/s ²	400 rad/s ²
In-Position Stability ⁽²⁾	0.005 arc sec	0.005 arc sec	0.005 arc sec	0.005 arc sec	0.005 arc sec	0.005 arc sec
Aperture	11 mm	11 mm	11 mm	11 mm	11 mm	11 mm
Maximum Torque (Continuous)	0.2 Nm	0.2 Nm	0.2 Nm	0.2 Nm	0.2 Nm	0.2 Nm
Load Capacity ⁽³⁾	Axial	3.0 kg (6.6 lb)	3.0 kg (6.6 lb)	3.0 kg (6.6 lb)	3.0 kg (6.6 lb)	3.0 kg (6.6 lb)
	Radial	2.0 kg (4.4 lb)	2.0 kg (4.4 lb)	2.0 kg (4.4 lb)	2.0 kg (4.4 lb)	2.0 kg (4.4 lb)
	Moment	3 Nm	3 Nm	3 Nm	3 Nm	3 Nm
Rotor Inertia (Unloaded)	0.001 kg-m ²	0.001 kg-m ²	0.001 kg-m ²	0.001 kg-m ²	0.0016 kg-m ²	0.0016 kg-m ²
Stage Mass	1.5 kg (3.3 lb)	1.5 kg (3.3 lb)	1.5 kg (3.3 lb)	1.5 kg (3.3 lb)	1.7 kg (3.74 lb)	1.7 kg (3.74 lb)
Material	Aluminum Body/Black Hardcoat Finish					
MTBF (Mean Time Between Failure)	30,000 Hours					

- Notes:
1. Certified with each stage. Requires the use of an Aerotech controller.
 2. In-Position Jitter listing is 3 sigma value.
 3. Axis orientation for on-axis loading is listed.
- Specifications are per axis, measured 25 mm above the tabletop. Consult factory for multi-axis or non-standard applications.
 - All error motion specifications are measured at 60 rpm.
 - For high speed operation, customer payload must be balanced to G1.0 per ISO 1940.


Electrical Specifications	ANT130-20-R ANT130-20-R-PLUS	ANT130-180-R ANT130-180-R-PLUS	ANT130-360-R ANT130-360-R-PLUS
Drive System	Slotless, Brushless, Direct-Drive Rotary Motor		
Feedback	Noncontact Rotary Encoder		
Maximum Bus Voltage	±40 VDC		
Limit Switches	5 V, Normally Closed		
Home Switch	Near Center		

Recommended Controller	ANT130-20-R ANT130-20-R-PLUS	ANT130-180-R ANT130-180-R-PLUS	ANT130-360-R ANT130-360-R-PLUS
Multi-Axis	A3200	Npaq MXR Npaq MR-MXH Ndrive ML-MXH	
	Ensemble	Epaq MXR Epaq MR-MXH Ensemble ML-MXH	
Single Axis	Soloist	Soloist ML-MXH	


- Notes:
1. Linear amplifiers are required to achieve the listed specifications. Other options are available.

Note: To ensure the achievement and repeatability of specifications over an extended period of time, environmental temperature must be controlled to within 0.25°C/24 hours. If this is not possible, alternate products are available. Please consult Aerotech Application Engineering for more information.


ANT130-R/ANT130-R-PLUS Series PERFORMANCE

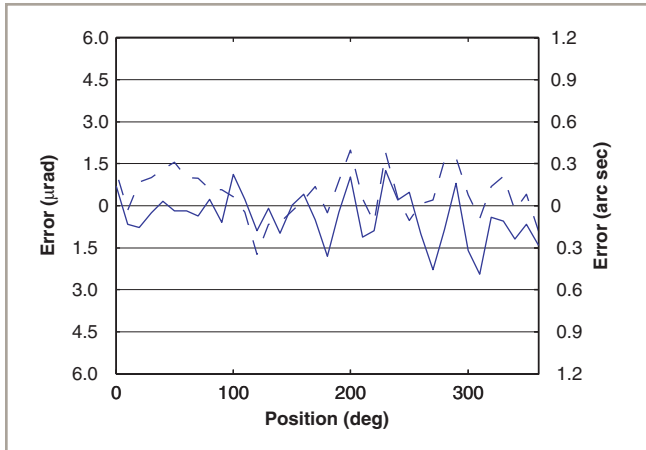


ANT130-R-PLUS accuracy plots showing excellent accuracy and bi-directional positioning capability.

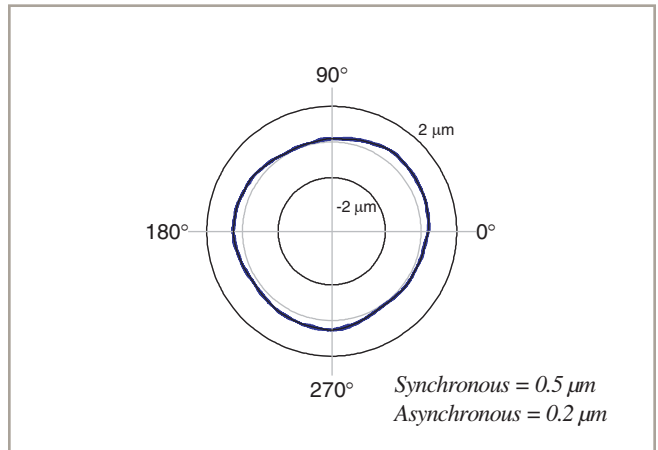

ANT130-R axial error plot illustrating outstanding synchronous and asynchronous error motion performance.


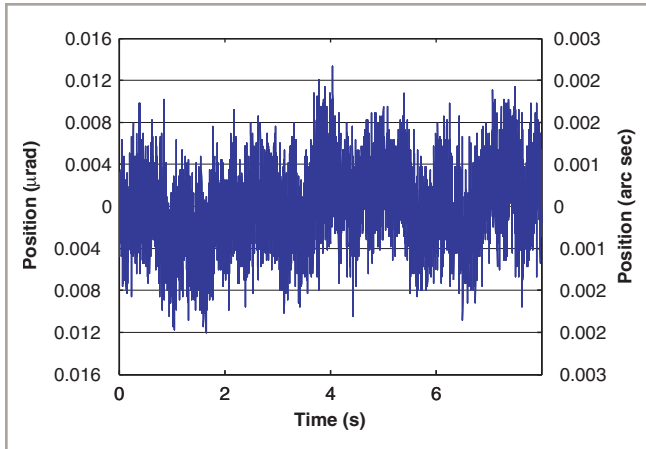


ANT130-R plot showing best-in-class in-position stability.

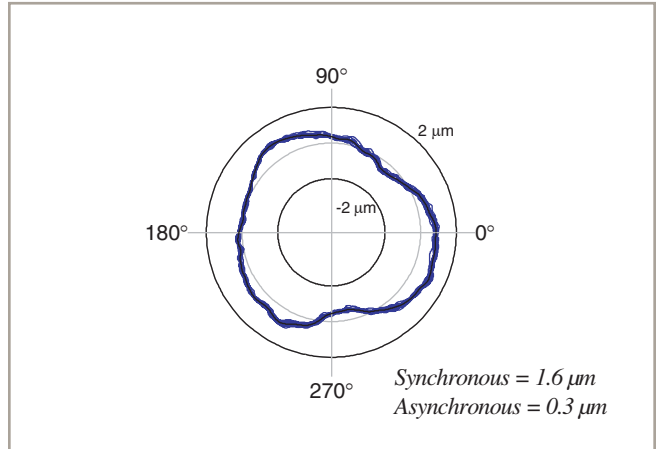


ANT130-R radial error plot illustrating outstanding synchronous and asynchronous error motion performance.

ANT130-R/ANT130-R-PLUS DIMENSIONS

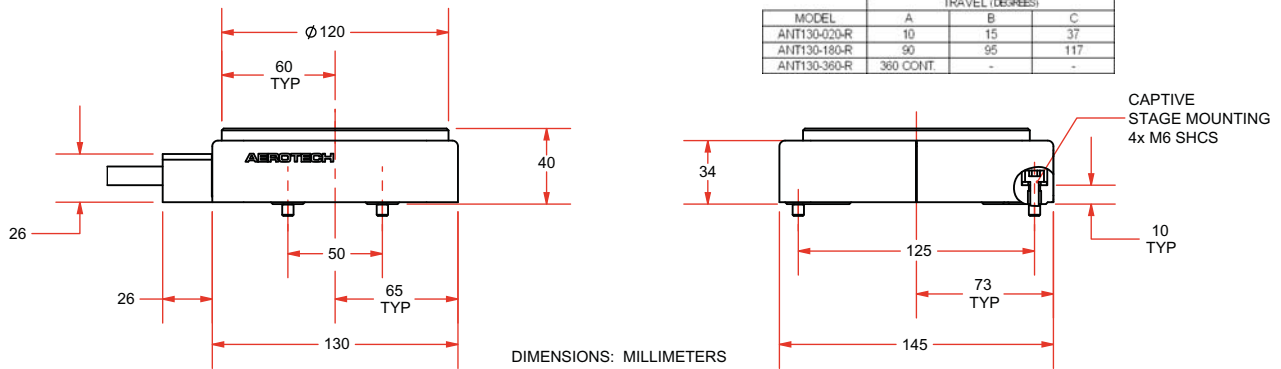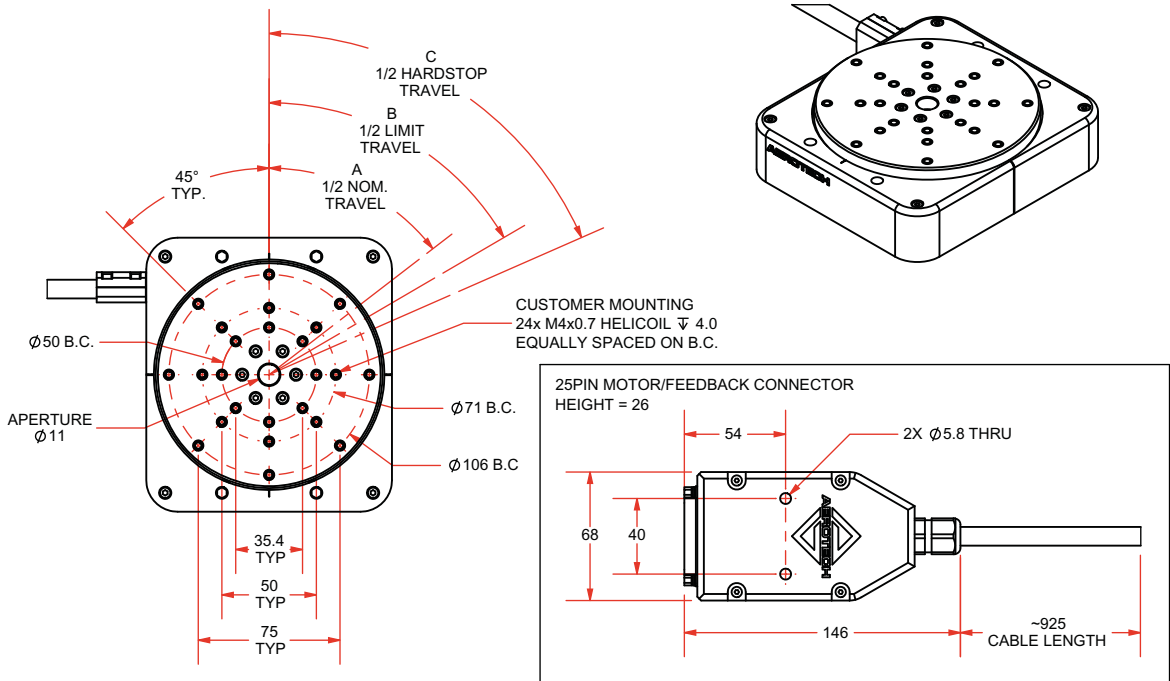

ANT130-R/ANT130-R-PLUS Mounting Plate DIMENSIONS

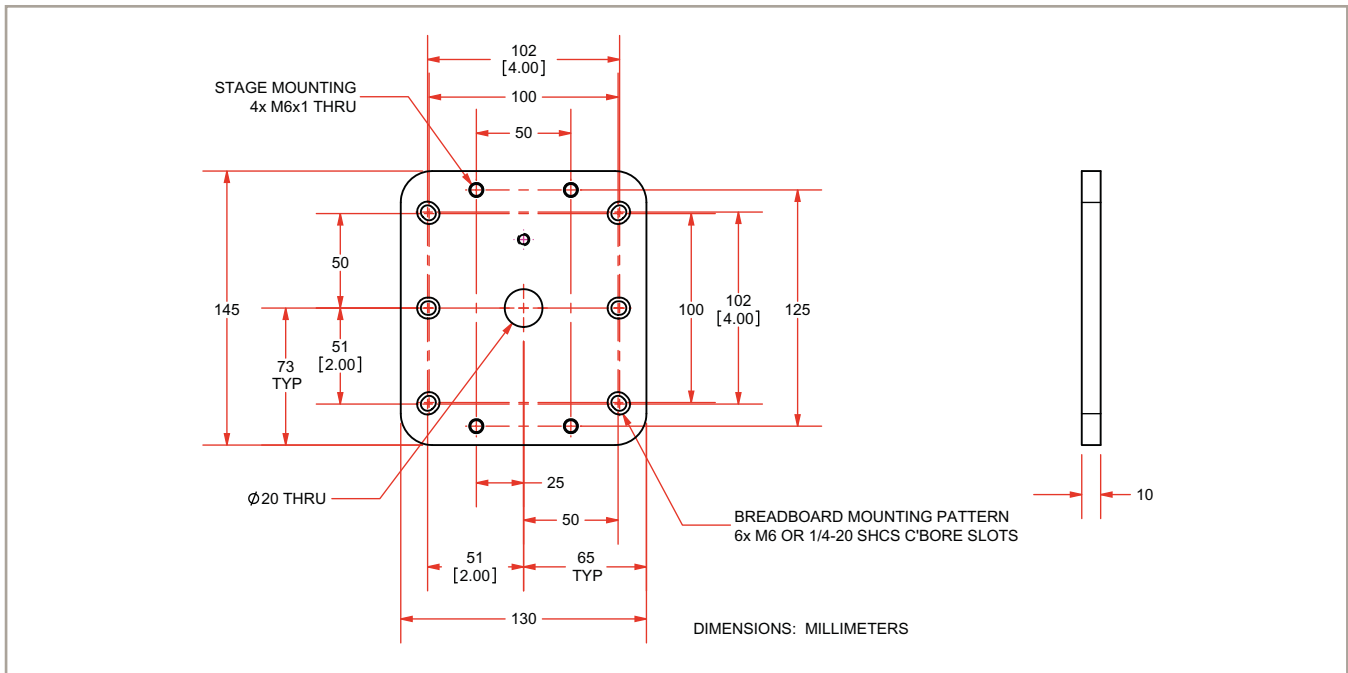

ANT130-R/ANT130-R-PLUS Series ORDERING INFORMATION

ANT130-R Series Rotary Stage

ANT130-R Aerotech direct-drive rotary positioner

Rotary Stage Travel

ANT130-20-R	20° rotation stage with slotless, brushless, direct-drive motor, direct-coupled high-accuracy rotary encoder, optical limits, and hard stops
ANT130-20-R-PLUS	20° rotation stage with slotless, brushless, direct-drive motor, direct-coupled high-accuracy rotary encoder, optical limits, and hard stops (high accuracy version)
ANT130-180-R	180° rotation stage with slotless, brushless, direct-drive motor, direct-coupled high-accuracy rotary encoder, optical limits, and hard stops
ANT130-180-R-PLUS	180° rotation stage with slotless, brushless, direct-drive motor, direct-coupled high-accuracy rotary encoder, optical limits, and hard stops (high accuracy version)
ANT130-360-R	360° continuous rotation stage with slotless, brushless, direct-drive motor, direct-coupled high-accuracy rotary encoder, and optical limits
ANT130-360-R-PLUS	360° continuous rotation stage with slotless, brushless, direct-drive motor, direct-coupled high-accuracy rotary encoder, and optical limits (high accuracy version)

Options

-MP Breadboard mounting plate