


**SVR 200/1 (single channel)**  
**SVR 200/3 (3 independent channels)**

**Voltage range:**  
 -50 V thru +200 V

**Manual setting of DC-Offset**  
 (superimposed to external signal)

**Variable attenuation**

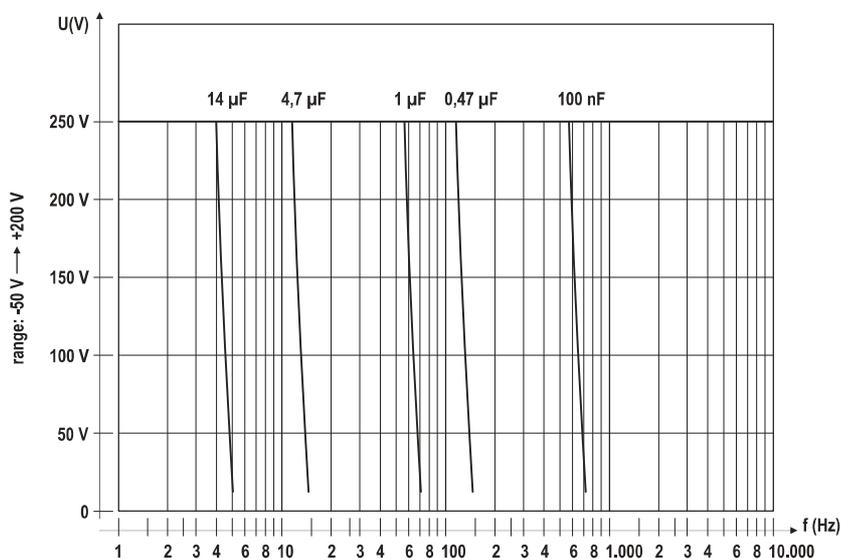

**Input:**

Signal: +/-5 V (+/-10 V with attenuation)  
 Impedance: 5 kOhms  
 Connector: BNC

**Additional features of 3 channel SVR 200/3 amplifier:**

Monitor BNC output per channel:  
 shows 1:1000 piezo voltage  
 LC-Display per channel

**Output:**

Connector: BNC  
 Voltage total: -50 V thru +200 V  
 DC-Offset range: -50 V thru +200 V  
 Gain: 40 (without attenuation)  
 Max. current: 45 mA  
 Noise: 1 mVpp (for 4 µFarad load)  
 Display: LCD  
 Dimensions W x D x H (mm):  
 single channel: 165 x 200 x 65  
 3-channels: 260 x 320 x 155  
 Weight:  
 single channel: 1.75 kg  
 3-channels: 4.7 kg



株式会社キーストンインターナショナル

277-0042 千葉県柏市逆井 13-27 黒沢ビル 3F  
TEL: 04-7175-8810 key@keystone-intl.co.jp

***Piezomechanik · Dr. Lutz Pickelmann GmbH***

Berg-am-Laim-Str. 64 · D-81673 Munich · Phone ++ 49/89/4315583 · Fax ++ 49/89/4316412  
e-mail: info@piezomechanik.com · <http://www.piezomechanik.com>

