


**630nm~633nm~635nm 50mw~60mw SM Fiber Coupled LD with PMF**

**633nm SM Coaxial Pigtailed Laser Diode with Polarization Maintaining Fiber (PM Fiber)**

WSLP-633-060m-PM


Wavespectrum Laser Group

www.wavespectrum-laser.com

633nm Pigtailed Diode Laser		Wavespectrum Laser Group	
PARAMETER	SYMBOL	VALUE	UNIT
Reverse Voltage	$V_r$	2.0	V
Operating Temperature	$T_{op}$	-10~+40	°C
Storage Temperature	$T_{stg}$	-40~+85	°C
Lead soldering temperature (10 sec.)	$T_{is}$	260	°C
<b>Features:</b> <ul style="list-style-type: none"> <li>● 633nm</li> <li>● PM Fiber</li> <li>● HHL Package Optional</li> <li>● TEC Cooler Optional</li> <li>● LD &amp; TEC Driver Optional</li> </ul>			
<b>Applications:</b> <ul style="list-style-type: none"> <li>● Medical laser treatment</li> <li>● Aiming beam</li> <li>● Others</li> </ul>			
<b>Specifications</b>	<b>WSLP-633-060m-PM</b>		
	Min	Type	Max
Center Wavelength@25°C	630nm	633nm	635nm
Recommended work Temperature	25°C		
Output Power	50mw	60mw	----
Fiber Type	Polarization Maintaining Fiber		
Fiber Core	4um		
Monitor Current	----	----	----
PD Reverse Voltage	----	----	----
Fiber Connector	FC		
Fiber Length	----	80cm	100cm
Threshold Current (Typ.)	----	70mA	100mA
Operating Current (Typ.)	----	185mA	230mA
Operating Voltage	----	2.6V	3.0V
Package Style	Coaxial		




**Coaxial Package View:**

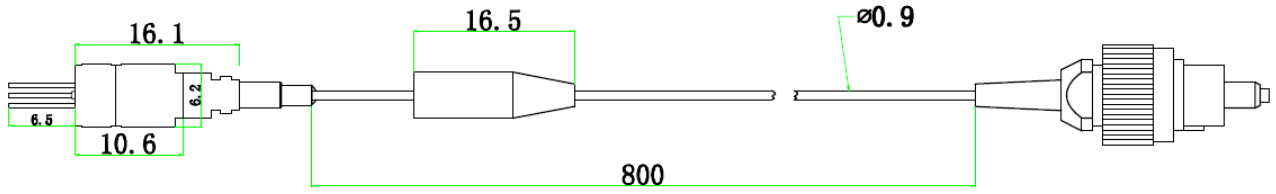

单位: mm

**PIN Bottom View:**

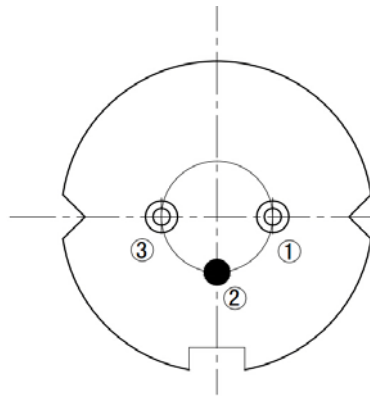

1	LD(+)
2	GND
3	LD(-)



Wavespectrum Laser, Inc.  
 www.wavespectrum-laser.com  
 wavespectrumlaser@gmail.com

