


NAC3404-H12.6

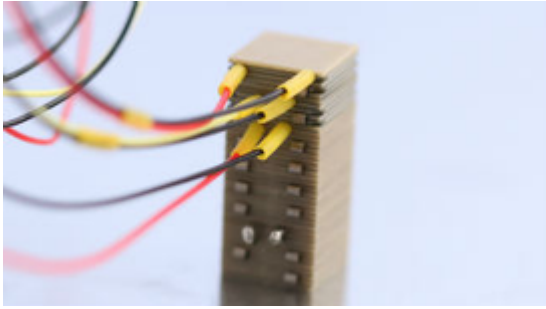


The Noliac shear stack NAC3404-H12.6 features motion in the X/Y/Z-axis. NAC3404-H12.6 measures 15x15 mm with a height of 12.6 mm and provides free stroke of 3/3/3 μm and a capacitance of 14.9/14.9/92.8 nF.

SPECIFICATIONS

Attributes	Value	Tolerance
Chamfers	X/Y/Z 0,00	
Length / outer diameter	15 mm	+/-0.20 mm
Width / inner diameter	15 mm	+/-0.20 mm
Height	12.6 mm	+/-0.05 mm
Operating voltage, max.	$\pm 320 \text{ V}$	
Free stroke, from -Vmax to +Vmax	3 μm	+/- 20%
Capacitance	14.9/14.9/92.8 nF	+/- 20%
Maximum operating temperature	150 $^{\circ}\text{C}$	
Material	NCE51	
Unloaded resonance frequency	86/86/86 kHz	
Electrodes	0,00	

DRAWINGS

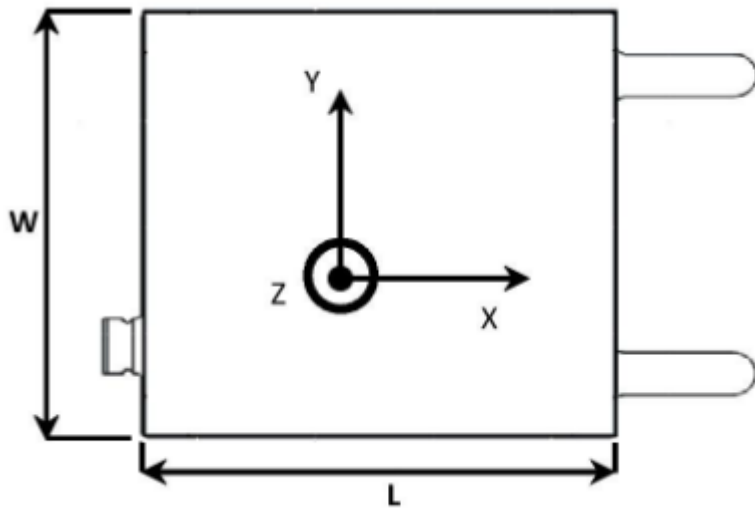

MOUNT AND CONNECT

Colour code

- Isolation plate: yellow
- Shear plate actuators X-motion: red
- Shear plate actuators Y-motion: blue
- Shear plate actuators Z-motion: clear yellow
- Electrodes: grey

End plates

As standard, the shear stacks are enclosed with 2 isolation end plates made from non-polarized piezoelectric material.

Please contact us for other options. Read more about [Noliac end plates](#).

Operating voltage

From $-V_{max} = -320 \text{ V}$ to $+V_{max} = +320 \text{ V}$ for X, Y and Z motions

Free stroke

Free stroke have been measured at room temperature

Operating temperature

Standard operating temperature from $-25 \text{ }^{\circ}\text{C}$ to $85 \text{ }^{\circ}\text{C}$

Capacitance

Capacitance is measured at 1 Vpp, 1kHz

WIRES

As standard, the shear stacks are delivered with these wires:

- 28 AWG PTFE Insulated Wires (red for X-motion, blue for Y-motion and yellow for Z-motion)

Please contact us for other wiring options.

Electrodes

As standard, the shear stacks are delivered with with these electrodes:

- Stainless steel 1.4304

Please contact us for other electrode options.

Read more under Mount and connect.